



## Technical Data Sheet


**BC-PH5**  
Slope corrector adjustable from 0 to 5%

### COMPONENTS

The BC-PH5 is composed of 2 pieces but supplied in assembled condition.

### CHARACTERISTICS

Weight: 0,188 kg  
Height: 12 mm  
Diameter: 205 mm  
Surface area: 330 cm<sup>2</sup>

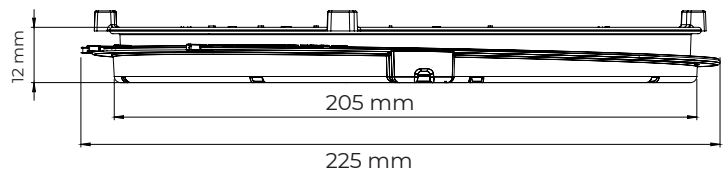


### MATERIAL

Copolymer polypropylene (CPP)  
Composition: +/- 80% first grade pre-selected recycled PPC, and +/- 20% Talc + Masterbatch black  
Designed and manufactured in Europe  
Use of recycled materials exclusively of EU origin  
Resistant to weathering, sea salts, algae and a wide range of chemicals  
Temperature range: -30 °C to +80 °C

### PACKAGING

Pieces per carton: 42 pcs  
Carton weight: 8,44 kg  
Carton dimension: 470 x 230 x 390 mm  
Cartons per pallet: 50 pcs  
Pieces per pallet: 2100 pcs  
Pallet dimensions: 100 x 120 x 220 cm

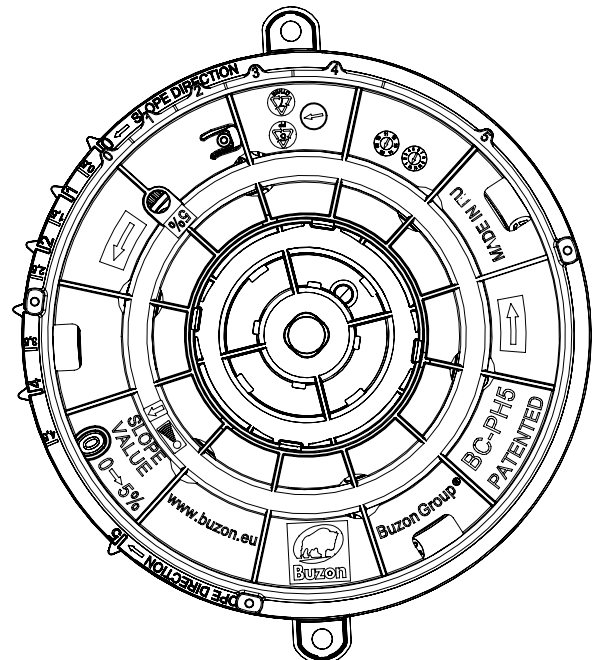


## APPLICATIONS

The BC-PH5 slope corrector is placed under the pedestals base and it makes it possible to compensate for slopes of 0 to 5% by simple rotation ( in increments of 0,5%).

By placing the BC-PH5 slope corrector below the Buzon pedestal, the height of application is increased by 12mm. Suitable for any kind of stable substrate, including applications directly on top of insulation panels.

Accessories are available for applications with various outdoor finishes, such as granite stone pavers, composite / timber decking, ceramic tiles and fibreglass or metal grating panels.

BC-PH5 is compatible with all the pedestals.

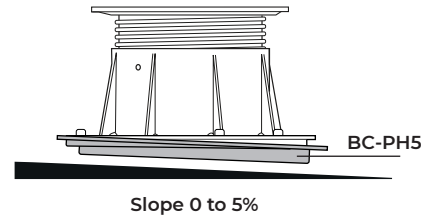

## COMPRESSION TEST\*

Load applied to the entire surface of BC-PH5 adjusted with a slope correction of 5 %.

Position	Slope	Breaking load (kN)	Breaking load (lbF)
1/1	5%	28,76 (2876 kg)	6 467

\* Tests carried out by SIRRIS

## SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.



043-055-1351  
Made From Min. 50%  
Recycled Content

